




American Flag


In the Box:

- American Flag
- Installation Hardware




Tools Required:

- Drill
- 1/4" Drill Bit
- 1/2" Socket and Ratchet
- Tape Measure
- Level

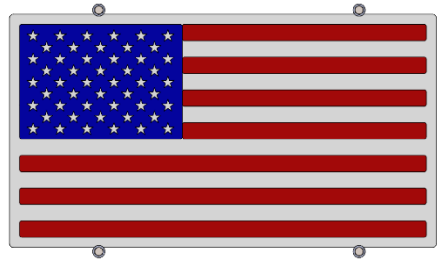


Installation

- Begin by finding wall location to install American Flag. Unit includes mounting hardware for wood constructed wall.
- Use level and tape to mark and drill 1/4" pilot holes in wall for mounting. See picture below for mounting pattern.
- Install bottom two lag bolts, washers, and standoffs as shown below.
- Place bottom of American Flag into groove of standoffs.
- Install remaining two lag bolts, washers, and standoffs. Ensure groove of standoff is resting on top of American Flag.
- Tighten lag bolts firmly.

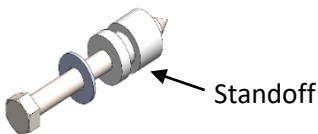

Hardware Install Details

14.75"

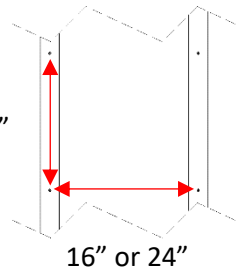

16" or 24"

Mounting Pattern

Additional Instructions

- Use **caution** while taking steps to install American Flag.


Questions or comments? Contact our support team via email at email@1up-usa.com



American Flag With Border


In the Box:

- American Flag With Border
- Installation Hardware
- Hook Strip
- (5) J-Bolts
- (2) 1/4-20 Set Screws
- (5) 1/4-20 Jam Nuts

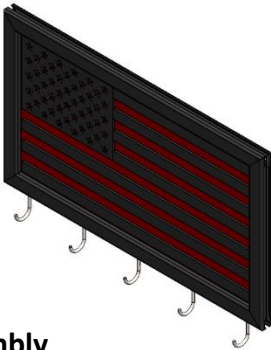

Tools Required:

- 1/8" Allen Wrench
- 7/16" Wrench
- Drill
- Tape Measure
- Level

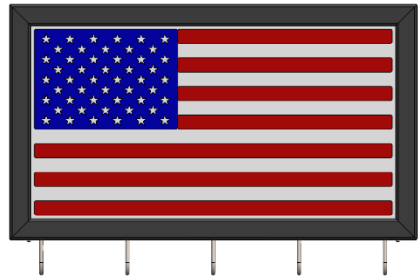

Assembly

- Thread all J-Bolts into Hook Strip.
- Thread all 1/4-20 Jam Nuts onto J-Bolts. With all J-Bolts aligned towards front of American Flag, tighten all 1/4-20 Jam Nuts using 7/16" wrench. 1/4-20 Jam Nuts to finish flush with top of J-Bolts.
- Slide Hook Strip into Flag Border extrusion with J-Bolts facing front of American Flag.
- Thread 1/4-20 Set Screws into both outside holes of Hook Strip. With 1/8" Allen wrench tighten 1/4-20 Set Screws until Hook Strip does not move.

Installation

- Find wall location to install American Flag. Fasteners to be installed into structural member of wall.
- Use level and tape to mark fastener mounting locations (Fastener spacing: 10.5" - 21.5").
- Secure fasteners into structural member of wall. Offset fastener head about 1/4" from wall.
- Hang American Flag with Border onto fasteners using slot on back side of American Flag.

Additional Instructions

- Use **caution** while taking steps to install American Flag with Border.

Questions or comments? Contact our support team via email at email@1up-usa.com