

Paplin's

No. 3190


Quilling Fringer Tool

STRAIGHT CUT FOR FRINGING FLOWERS, ETC.

ADJUST DEPTH & WIDTH OF FRINGE

FOR 1/4 INCH OR 3/8 INCH PAPER STRIPS

1. To adjust the width of the fringe, slightly loosen screw behind nut. With nut in desired position, hold nut in place and then tighten screw. Please note only minor adjustments need to be made to vary the width of fringe.
2. Adjust depth of fringe using the Allen wrench provided. Again, only slight adjustments need be made as the screw becomes more visible under the arm, and the depth of your fringe will become shorter.

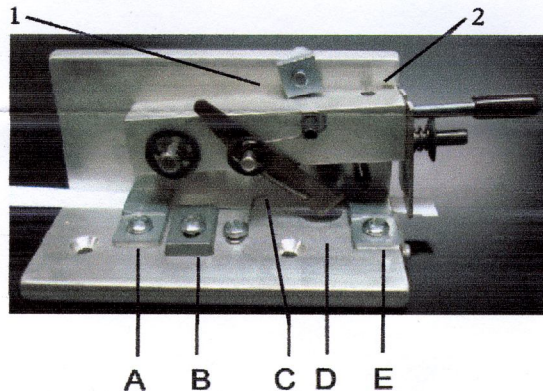

Insert paper under guide A, then under the spring C. Continue under advance fringer D, and finally under the last guide E. Guide B can be adjusted with screwdriver to the width of the quilling paper.

Please Read All Instructions Before Using Your Fringer

Each fringer is tested before shipping. There is quilling paper in the fringer, so take a look at how the tool is threaded, and how paper must go under both guides, the wire, and the feed arm. Here are some tips on using the fringer:

When feeding paper under guides use tweezers to slide paper under wire, feed arm, and second guide. If paper gets bunched up from trying to push through guides, it will not feed properly.

Once paper is threaded through guides, be sure wire is resting on paper and not off to the side.

This fringer has adjustments for both depth and width (see diagram)

Silver, gold, and pearlized papers should go through the fringer white side up, (the colored side is too slippery to feed through)

Normal maintenance may require a light wiping of oil on metal parts.



Made in the USA

Paplin Products, LLC

Strongsville, Ohio 44149